


# HSK-M-Flex

Item number 1623161150

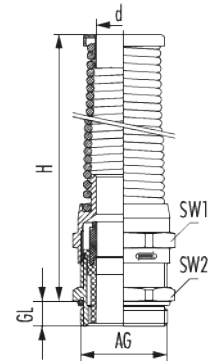

## Technical data

<b>Material</b>	Nickel-plated brass
<b>Steel spring</b>	INOX 1.4310
<b>Clamping insert</b>	Polyamide V0 according to UL94
<b>Seal</b>	NBR
<b>Material o-ring</b>	NBR
<b>Protection class</b>	IP68 - 10bar/30min , IP 69 K
<b>Type Rating by</b>	4 , 4X , 6 , UL 50E
<b>Temperature range</b>	-40°C to +100°C
<b>Variant</b>	Metric
<b>External thread (AG)</b>	M16 x 1,5
<b>Cable diameter</b>	5 - 10 mm
<b>d</b>	10.3 mm
<b>Thread length (GL)</b>	6 mm
<b>Height (H)</b>	77 mm
<b>Wrench size (SW1/SW2)</b>	20/20 mm
<b>Tightening torque</b>	5 Nm



# HSK-M-Flex

Item number 1623161150

## Commercial data

Packaging Unit	50
EAN code	4033878433096
Weight	0.05225 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-32
Customs tariff number	74198090

## Note:



Dimensions and specifications may be changed without prior notice



[www.hummel.com](http://www.hummel.com)