
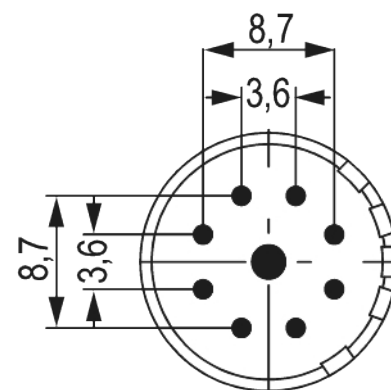


# Contact insert M23 Signal - 9-pole

Item number 7003981102

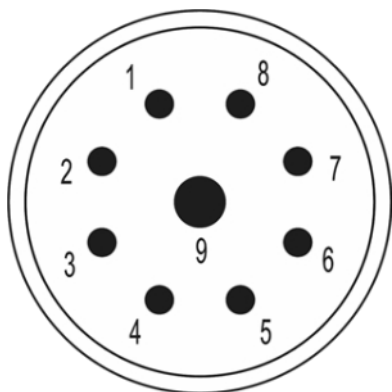

## Technical data

Characteristic of connection	Crimp
Number of poles	9
Pole picture	8 + 1
direction of rotation	Pinout clockwise
Insert	Socket
Color contact insert	white
Material insulating body	PA 6 , PBT
Number of contacts signal	8
Number of contacts power	1
Contact-Ø signal	1 mm
Contact-Ø power	2 mm
Terminal cross section power	0,75 - 2,5 mm <sup>2</sup>
Nominal current signal	8 A
Nominal current power	20 A
Nominal voltage at degree of pollution 3 signal	200 V <sup>~</sup>



# Contact insert M23 Signal - 9-pole

Item number 7003981102

Nominal voltage at degree of pollution 3 power	200 V~
Test voltage signal	1500 V~
Test voltage power	1500 V~
Insulation resistance signal	$> 10^8 \Omega$
Insulation resistance power	$> 10^8 \Omega$
max. contact resistance signal	3 mOhm
max. contact resistance power	3 mOhm
Temperature range	-40°C to +125°C
Degree of Protection	3
Flammability	V-0 (UL 94)



# Contact insert M23 Signal - 9-pole

Item number 7003981102

## Commercial data

<b>Packaging Unit</b>	5
<b>EAN code</b>	4033878501559
<b>Weight</b>	0.004 kg
<b>ETIM 7</b>	EC003557
<b>ETIM 8</b>	EC003557
<b>ETIM 9</b>	EC003557
<b>eCl@ss 10.1</b>	27440223
<b>Customs tariff number</b>	85469010

Note:

