



PLIOSPIRE Plus

Material: polyethylene
Operating temperatures: -50 to +85 °C
Tensile strength at break: 12 MPa
Ultimate elongation: 550 %
Dielectric strength: >25 kV/mm

Application : Due to the double helix in Pliospire^{Plus}, cable bundles can be handled more quickly with the added advantage of branching where required. Pliospire^{Plus} is delivered in coils in bags and can be taken from the package where required without twisting or tangling.

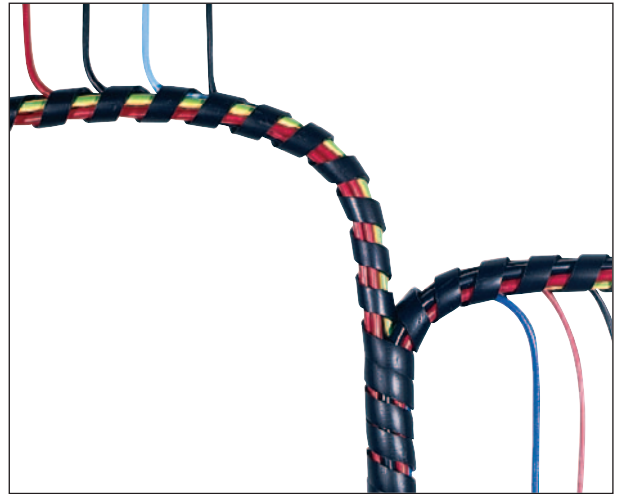

type	article number		capacity Ø mm	Ø i.d. mm	wall thickness mm	spiral pitch mm	 m
	black *	natural					
PE 3 Plus	0819 0041 010	0819 0031 018	1,5...7	1,5	0,75	2 x 4	50
PE 6 Plus	0819 0042 010	0819 0032 018	5...20	4	1	2 x 6	25
PE 12 Plus	0819 0043 010	0819 0033 018	10...40	9	1,5	2 x 8	25
PE 22 Plus	0819 0044 010	0819 0034 018	25...100	19	1,5	2 x 8	25

* Color black: Weather resistant

