


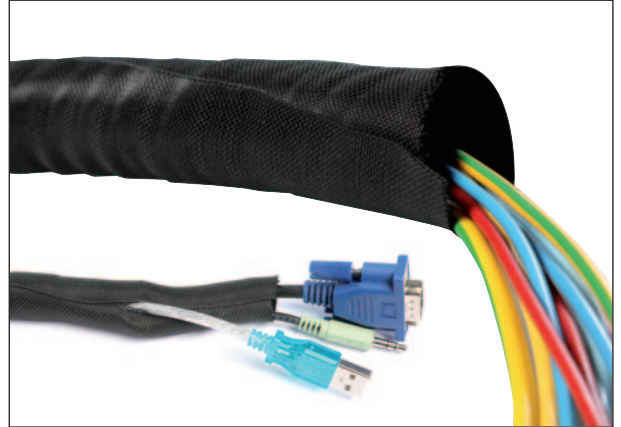

PLIOSIL WS

Material: PET
Colour: black
Operating temperatures: -50 to +150°C
Flame resistance: V0 UL94

Application: Textile split braided sleeving for assembly after wiring, with easy and quick addition of new cables. Self-closing, with overlapping for a clean closure and optimal mechanical protection. Very flexible, it allows to bend and conform to irregular shapes, without stiffening the cable harnesses.

Note: Easy and clean cutting when cold or hot



type	int. Ø (mm)	 article number	m	 article number	m
PLIOSIL WS005	5	0640 0005 010	100	0640 0105 010	5
PLIOSIL WS008	8	0640 0008 010	100	0640 0108 010	5
PLIOSIL WS010	10	0640 0010 010	100	0640 0110 010	5
PLIOSIL WS013	13	0640 0013 010	50	0640 0113 010	5
PLIOSIL WS016	16	0640 0016 010	50	0640 0116 010	5
PLIOSIL WS019	19	0640 0019 010	25	0640 0119 010	5
PLIOSIL WS025	25	0640 0025 010	25	0640 0125 010	5
PLIOSIL WS029	29	0640 0029 010	25	0640 0129 010	5
PLIOSIL WS032	32	0640 0032 010	25	0640 0132 010	5
PLIOSIL WS038	38	0640 0038 010	25	0640 0138 010	5
PLIOSIL WS050	50	0640 0050 010	25	0640 0150 010	5

New



Packaging for lengths of 5 m:

types WS005 to WS016
in distribution boxes,

types WS019 to WS050
in cardboard reel.

Operating
instruction
in video



A6/5-02

D4/1-01

